


**Hardware** (Continued)

**Slide Latches**

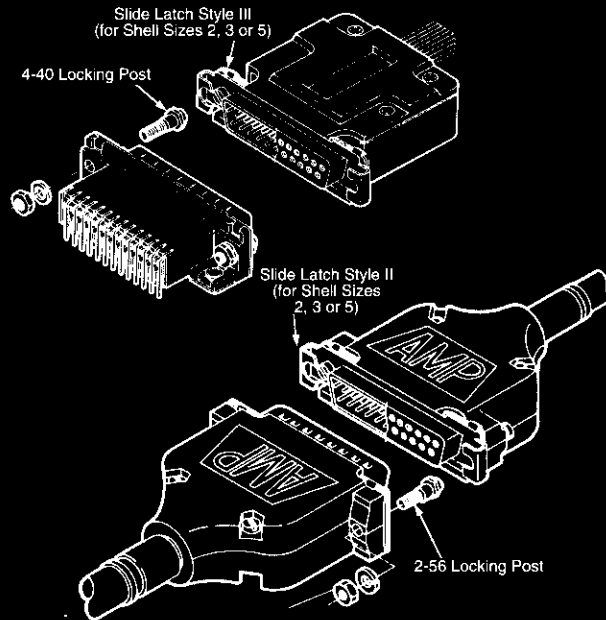

Typical Applications of Locking Posts and Slide Latches

Shell Size	Style	Dimensions			Slide Latch Kit Numbers		Side Latch Only
		A	B	C	Individual	Bulk Packed*	
1	I	1.397	.490	.415	745404-1	—	164890-1
		35.48	12.45	10.54			
	II	1.725	.470	.547	745583-1	—	749027-1
		43.82	11.94	13.89			
2	II	1.725	.470	.415	745583-5	745583-6	749027-1
		43.82	11.94	10.54			
		1.725	.470	.450	745583-7	—	—
		43.82	11.94	11.43			
	III	1.725	.470	.415	—	786653-1 <sup>7</sup>	—
		43.82	11.94	10.54			
		1.725	.490	.290	749028-1 <sup>7</sup>	—	—
		43.82	12.45	7.37			
I	1.725	.437	.415	—	786138-1 <sup>7</sup>	—	
	43.82	11.10	10.54				
3	II	2.265	.470	.547	745584-1	—	749996-1
		57.53	11.94	13.89			
3	III	2.265	.470	.415	745584-3	—	749996-1
		57.53	11.94	10.54			
4	I	2.913	.490	.415	745407-1	—	164890-4
		73.99	12.45	10.54			
5	III	2.819	.575	.415	745578-3	—	749997-1
		71.60	14.61	10.54			

\*Each part is individually bulk packed for multiple kit orders.

- Notes:**
1. All parts are packaged unassembled.
  2. Each kit is comprised of a slide latch and two screws, flat washers (if required), lock washers and hex nuts. Style I slide latches are also furnished as part of cable clamp kits (page 147).
  3. Style I slide latches can be used with cable clamps that do not extend beyond the front flange of the connector or on connectors without cable clamps.
  4. Style II slide latches can be used with any cable clamp that has the mounting ear configuration as shown above.
  5. Style III slide latches can be used on connectors without cable clamps or with cable clamps that do not have the mounting ear configuration shown with Style II above.
  6. Slide latches mate with locking posts (page 156).
  7. No nuts, washers, or lockwashers.

Cable Connectors